




# FA 60 005 XX



**FA 60 005 06**



**FA 60 005 08**




**FA 60 005 12**




**FA 60 005 15**






**FA 60 005 20**

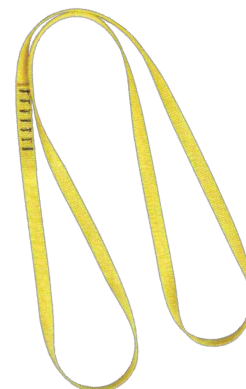

**FA 60 005 30**

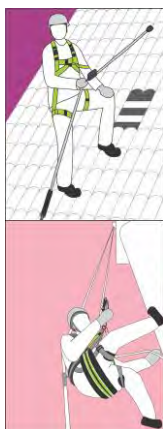

<b>HS CODE</b>
63079098
<b>CARTON SIZE / PCS.</b>
<b>FA 60 005 06 : 60 x 40 x 24 cm / 100</b>
<b>FA 60 005 08/12/15/20/30 : 40 x 40 x 24 cm / 50</b>
<b>AET (UE) N°2777/10789-01/E01-01</b>
<b>Satra Technology Europe Ltd., N° 2777,</b> Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
<b>MODULE D FI14/14003.02</b>
<b>SGS Fimko Oy, N°0598</b> Takomotie 8, 00380 HELSINKI, Finland

REF.	<b>FA 60 005 XX</b>
CE	EN 795:2012 Type B EN 566
	x1
LG.	0.6 m   0.8 m   1.2 m   1.5 m   2.0 m   3.0 m
MAT.	 20 mm PES
R (kN) / MBS (kN)	22 kN / 30 kN
	0.07 kg   0.09 kg   0.13 kg   0.16 kg   0.21 kg   0.33 kg



**Nombre d'utilisateurs**  
Number of users  
**Cantidad de usuarios**  
Quantità di utilizzatori  
**Anzahl der Benutzer**

**R (kN) / MBS (kN)**

**Résistance statique (en kN) / Résistance à la rupture**  
Static strength / Minimum Breaking Strength  
**Resistencia estática (en kN) / Resistencia a la ruptura (en kN)**  
Resistenza statica (in kN) / Resistenza alla rottura (in kN)  
**Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)**